

ATOLL

Unlimited Camera Angles



Silence Corner

Specially designed for landscape photographers, allowing users to quickly adjust the camera angle on a tripod. It looks like a lens tripod collar but is mounted on the camera, instead of on the lens. While it is mounted, you can still use a wide variety of lenses.





ATOLL

- 10 x Faster than using an standard L-bracket plus the centre of gravity is more stable than using an L-bracket
- L-Brackets need to be released from tripod clamp, re-positioned and fixed back to the tripod clamp = Atoll simply requires a knob to unlocked and the camera can be freely rotated between portrait and landscape
- When rotating Atoll there is 3 click points at 0, 90, 180 degrees to ensure the image remains level
- Compatible with ALL Tripods – Atoll features an Arca Swiss compatible foot and is instantly compatible with all Arca compatible heads or use the 1/4" mount with any other tripod.
- Quickly change lenses without needing to remove the Atoll or remove the camera from a tripod
- Fully compatible with ALL tilt and articulating screens









ATOLL S

Weight:102g

SIZE:93.2x75.5x94.8mm

Inside diameter:63.5mm

Standard

Quick release plate



ATOLL C

Weight:112g

SIZE:93.2x90.85x109.6mm

Inside diameter:75mm

Standard

Quick release plate



ATOLL D

Weight:120g

SIZE:117.75x90.85x109.6mm

Inside diameter:75mm

Extended

Quick release plate




Standard

Quick release plate

Weight:24g

SIZE:44.1x50.5x14.4mm

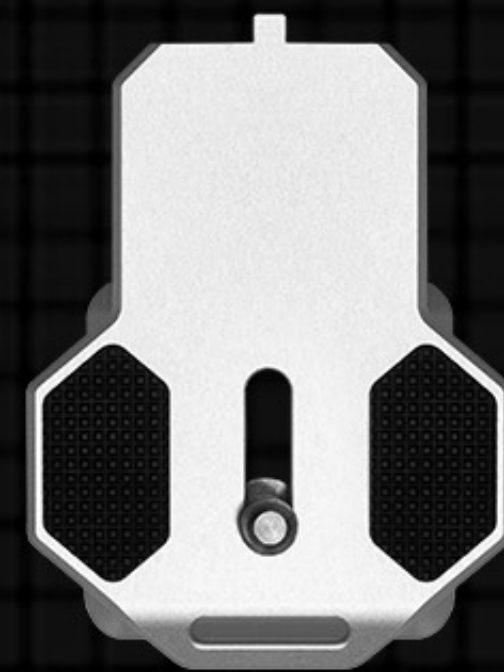

Extended

Quick release plate

Weight:33g

SIZE:68.6x50.5x14.4mm



Heightening plate

Weight:18g

SIZE:52x32x7.8mm

COMPATIBILITY

Brand	Model	ATOLL S	ATOLL C	ATOLL D	Heightening Plate	NOTE	
SONY	A6000/A6300/A6500	V			recommend	*Compatible with Sigma MC11 adapter *Not Compatible Sony LA-EA5 adapter Metabones adapter or other adapters not listed.	
	A6100/A6400/A6600	V			recommend		
	ZV-E10	V			recommend		
	FX3/A7C/A1/A9/A92	V					
	A7/A72/A73/A74	V					
	A7R/A7R2/A7R3/A7R4/A7R5	V					
	A7S/A7S2/A7S3	V					
	* The inner diameter of the ATOLL S is 63.5mm, and lenses larger than 63.5mm in diameter cannot be mounted.						
	* Most Sony E-mount lenses can be mounted						
	* Some manual lenses have a large diameter and cannot be installed.						
* A6XXX & ZV-E10 series cameras are low in height,It is recommended Add-ons Heightening Plate for more adjustment space							
*The lens release button will be covered by the ATOLL, need to adjust the front and rear position of the ATOLL to get the best finger space.							
* Because the body of Sony α series cameras is very compact(such as A7S/A73/A7R3, etc. or earlier cameras) the space between the fingers and the camera grip will be affected. For users with larger fingers or when wearing gloves the space will be more limited. Adjust the front and rear position of the ATOLL to achieve the best space.							
Brand	Model	ATOLL S	ATOLL C	ATOLL D	Heightening Plate	NOTE	
Canon	R/R5/R6/R6 II		V			*Compatible with EF-RF adapter *Not Compatible Control Ring adapter & Drop-In Filter Mount adapter or other adapters not listed.	
	RP/R7/R10		V		required		
	550D/650D/760D/77D/850D			V	required		
	50D/60D/70D/80D/90D/7D/7D2			V		* ATOLL cannot fully align to the lens center, EF 11-24 f/4 & 16-35 F/2.8 III & 24-70 f/2.8 II or larger lenses cannot be mounted.	
	6D/6D2			V			
	5D/5D2/5D3/5D4/5DS/5DSR			V		* Zoom ring of EF 11-24 f/4 & 16-35 f/2.8 III & 24-70 f/2.8II or larger lenses may interfere with ATOLL and is not recommended.	
	* The inner diameter of the ATOLL C/D is 75mm, and lenses larger than 75mm in diameter cannot be mounted.						
*The recommended maximum mountable lens for Canon RF mount is RF 70-200 f/2.8							
*The recommended maximum mountable lens for Canon EF mount is EF 16-35 f/2.8 II							

COMPATIBILITY

Brand	Model	ATOLL S	ATOLL C	ATOLL D	Heightening Plate	NOTE
Nikon	Z5/Z6/Z6II/Z7/Z7II		V			* ATOLL cannot fully align to the lens center, But most of the Z-series lenses like Nikon Z 14-24 f/2.8 & 24-70 f/2.8 can be mounted. * Compatible with FTZ II adapter * ATOLL cannot fully align to the lens center when used with an FTZ adapter, and non-NIKON lenses may not be mounted.
	Z30/Z50/Zfc		V		required	
	D3500/D5600			V	required	
	D80/D90/D300/D300S/D500			V		* ATOLL cannot fully align to the lens center of the D3XX/D5XX/D8XX series and D700 .
	D7000/D7100D/7200/D7500			V		
	D600/D610/D700/D750/D780				V	When using a 24-70 f/2.8E or larger lens, the gap between the ATOLL and the lens is small and there is a risk of scratching. It is not recommended to use together.
* The inner diameter of the ATOLL C/D is 75mm, and lenses larger than 75mm in diameter cannot be mounted.						
*The recommended maximum mountable lens for Nikon Z mount is Nikon 24-70mm f/2.8S						
* When using with FTZ, the ATOLL is mounted on the FTZ, not the camera.						
* When using with FTZ II, ATOLL is mounted to the camera.						
* The recommended maximum mountable lens for Nikon F mount is Nikon 24-70mm f/2.8E						

COMPATIBILITY

Brand	Model	ATOLL S	ATOLL C	ATOLL D	Heightening Plate	NOTE
FUJIFILM	XH1/XT2/XT3		V		required	* ATOLL cannot fully align to the lens center, But can still go with Most Fujifilm lenses.
	XT4/XT5/X-H2S			V	required	
Panasonic	GX8/GX9/G85		V		required	* ATOLL cannot fully align to the lens center, But can still go with Most Panasonic lenses.
	G9/GH5/GH5 II/GH6			V	required	
	S5		V		required	
	S1		V			
Leica	SL/SL2		V			
Olympus	EM5 II/EM5 III		V		required	* ATOLL cannot fully align the lens center, but 7-14 & 12-40 & 40-150mm f/2.8 lens all can be mounted
	EM1/EM1 II/EM1 III/OM1		V		required	

Attention

* All tilt-shift lens cannot be mounted.

* Most of Sigma and Tamron f/2.8 DSLR lens diameter exceeds the inner diameter of ATOLL and cannot be mounted.

EX: Sigma 14-24 f/2.8 & 24-70 f/2.8
Tamron 15-30 f/2.8 & 24-70 f/2.8

* For cameras with a protruding top (such as Nikon D600/D750) the flash of the camera will be stuck with ATOLL and can only be rotated to 135 degrees but not 180 degrees.

* Models with the Remote control port or function button in front of the camera will be covered by ATOLL
EX: Canon R5/5D4

* Some lenses have a switch button on the left side, if the switch button is close to the camera, it may be covered by ATOLL you need to adjust the front and rear positions of the ATOLL to achieve the best space.

*If the lens release button is on the left side of the camera, when you need to change the lens in the vertical mode the release button may be covered by ATOLL. you need to adjust the front and rear positions of the ATOLL to achieve the best finger space.

*Because ATOLL is mounted on the camera, can't balance the camera optimally like a tripod collar with long lenses. If you use a long lens over 200mm or more than 1kg, it is recommended to use it with the original tripod collar for the most stable operating experience.

* ATOLL is suitable for general DSLR and mirrorless cameras, The following cameras are not compatible with ATOLL
-Flagship cameras (similar to Canon 1DX/Canon R3/Nikon D4/Nikon Z9)
-Medium format cameras(like Fujifilm GFX100S)
-Camera with battery grips or body cages